HSF

NOTES:
Current Rating:1AMP
Contact Resistance:30mΩ max
Withstand Voltage:250V AC/DC
Insulation Resistance:1000MΩ min
Operation Temperature:−40℃ to +105℃

Contact Material:Phosphor Bronze(C5191−H)
Contact plating:Au Or Sn Over Ni
Insulator Material:PA9T+30%GF(UL94V−0)

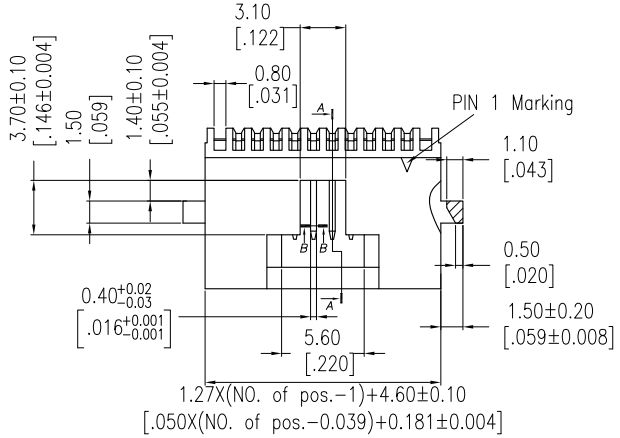



SECTION B−B
SCALE 10:1

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

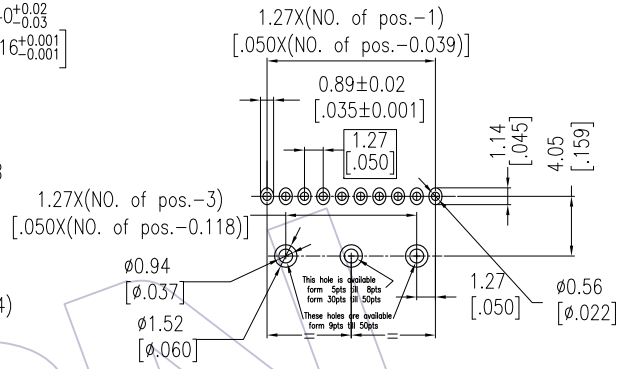



SECTION C−C
SCALE 10:1

Ordering Information

WF1271- 1 WR H XX S0 B T 0

- No.of Pins: 4~50 PIN
- Contact Plating: S0=Gold Flash/Tin
- Packing: T=Tube

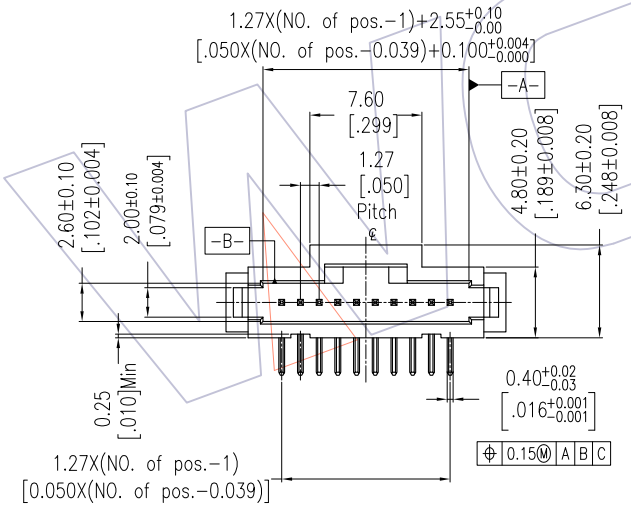



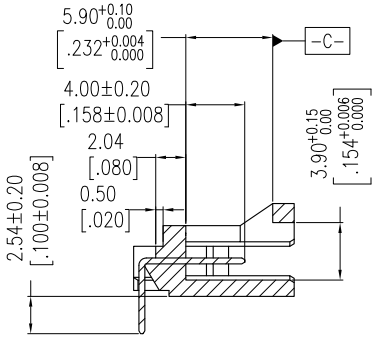

SECTION A−A
SCALE 1:1

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
AO	2016/07/17	NEW	——

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	JYHuang	DATE	2016/07/17
CHECK		DATE	
APPROVE		DATE	

SCALE	FIT
UNIT	mm / inch
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. WF1271−1WRHXXS0BT0

TITLE: 1.27 Wafer Conn 90°DIP TYPE With Ear

Customer NO.

WCON
Http: www.wcon.com

WCON−Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON−Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com