

HSF

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)







NOTES:
 Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 800V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -25°C to +85°C

Contact Material: Brass
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA66 UL94V-0

Ordering Information

WF2501A - WS XX W 0 1

H=P/PA46 No. of pins Contact Plating
 Blank=P/A66 02-1SF G0=Gold Flash
 G3=10μ"Gold G4=15μ"Gold
 G5=30μ"Gold Blank=Tin
 Color B=Black
 W=White O=PE Bag
 T=Tube Packing

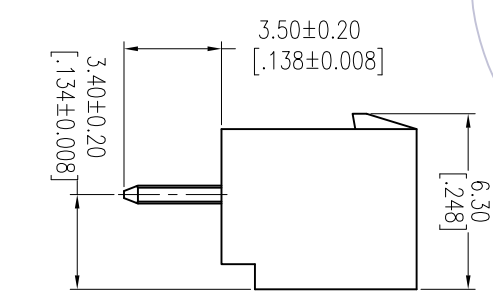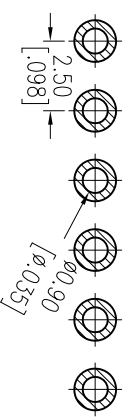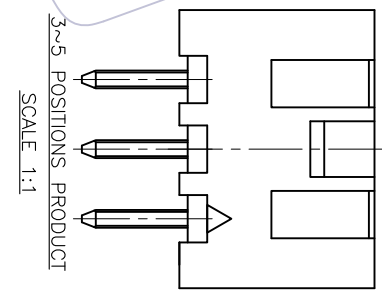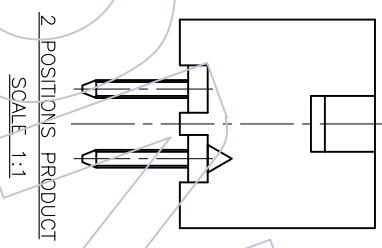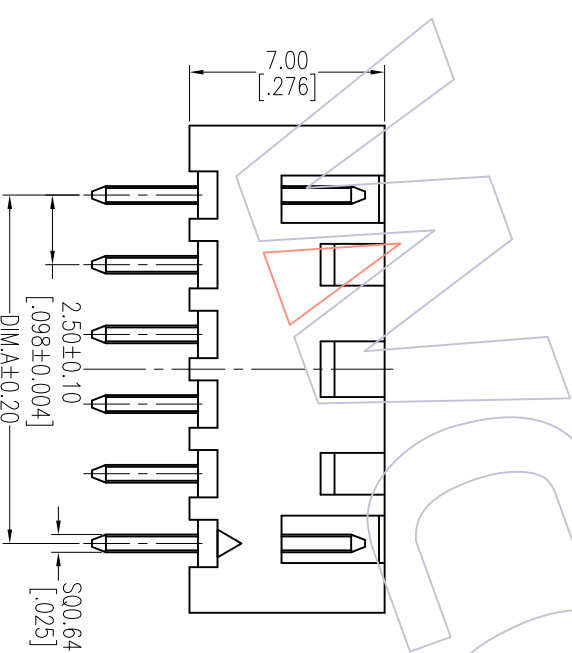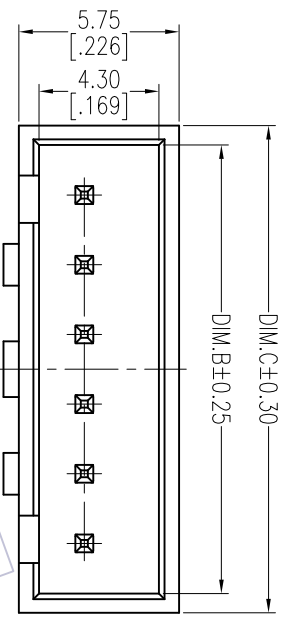

No. Of POSITION	DIM. A	DIM. B	DIM. C
02	2.50	6.10	7.48
03	5.00	8.60	9.98
04	7.50	11.10	12.48
05	10.00	13.60	14.98
06	12.50	16.10	17.48
07	15.00	18.60	19.98
08	17.50	21.10	22.48
09	20.00	23.60	24.98
10	22.50	26.10	27.48
11	25.00	28.60	29.98
12	27.50	31.10	32.48
13	30.00	33.60	34.98
14	32.50	36.10	37.48
15	35.00	38.60	39.98

6-15 POSITIONS

OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
XX	JYHuang	2013/06/25	mm		WF2501A-WSXXW01
XX	CHECK	DATE	A4		TITLE: 2.50 PITCH 180° DIP TYPE SING ROW WAFER
X.XXX	±0.15	DATE	1/1		Customer NO.
Angle	± 3'	APPROVE			
DIM	TOL	DATE	PROJ.		
CHANGE					
REV	DATE	MODIFICATION DESCRIPTION			
A0	2013/06/25	NEW			

WCON

Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com