






NOTES:
 Rated Current:2.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40°C to +105°C
 Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+30%G.F UL94V-0 BK

Ordering Information


1240-12 XX XX R XXX X 1

No. of Pins Contact Plating Pin Length(Short) Packing
 Per Row:02-40 G0=Gold Flash L=A+B+2.7 0=PE Bag
 G3=10u"Gold Standard:95=9.5 T=Tube
 G4=15u"Gold
 G5=30u"Gold
 S0=Gold Flash/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin

Item	Pin Length	A	B	Mating
Standard	9.50	2.80	4.00	2249 2250
Alternate				

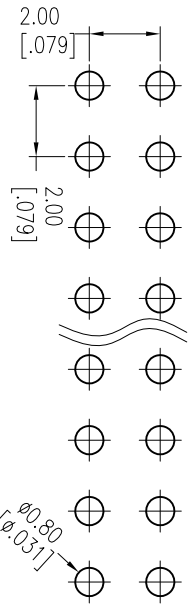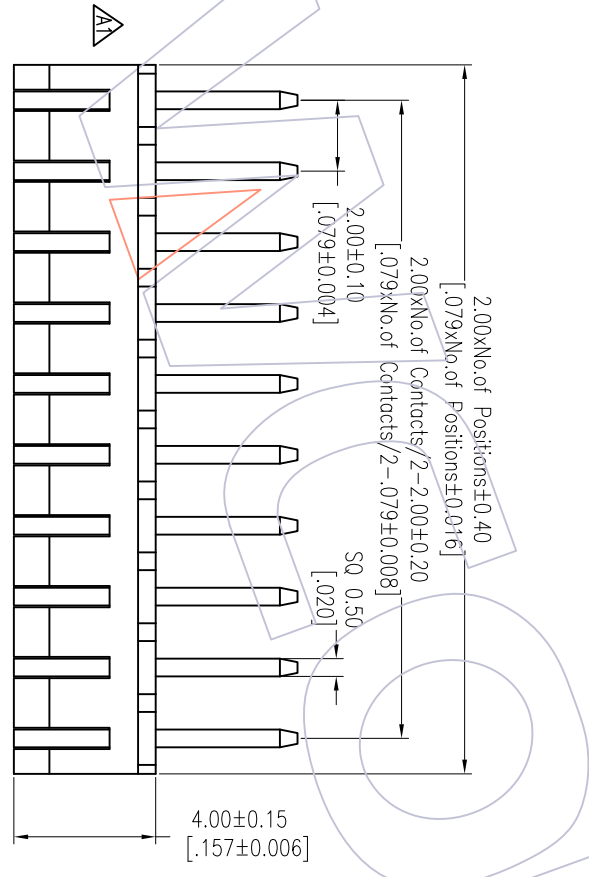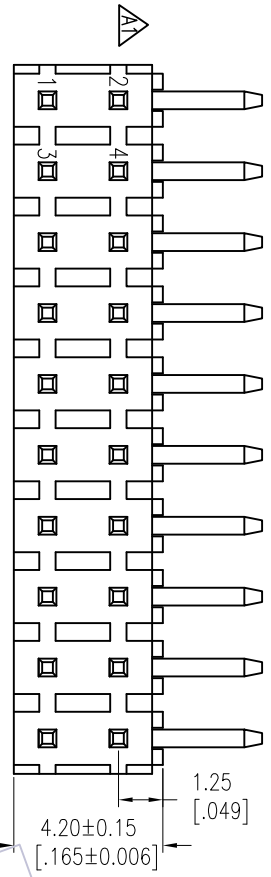

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

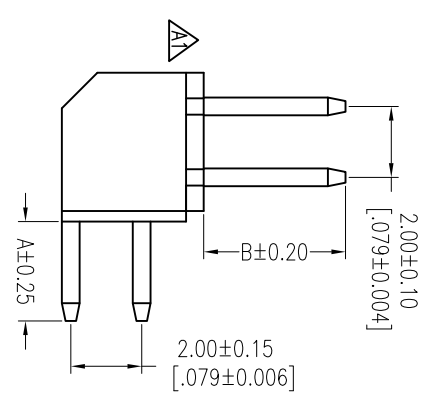

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	Fit	PART NO.	TITLE:	Customer NO.	WCON-Dongguan	WCON-Kunshan
A1	2014/01/16	Modify drawing	△	XX	Wang	2014/01/16	mm	A4	1240-12XXXXXXX	PH2.00 DUAL ROW 90° H=4.0		Tel: +86 769 85358920	Tel: +86 512 57468408
A0	2012/04/26	NEW	---	X.XXX	CHECK		1/1					Fax: +86 769 85358915	Fax: +86 512 57468468
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	APPROVE	DATE	SHEET	PROJ.				E-mail: sales@wcon.com	E-mail: sales@wcon.com



Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com