


# HSF

**NOTES:**

Current Rating: 5.0AMP  
 Contact Resistance: 10mΩ Max  
 Withstand Voltage: 1500V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +115°C

Contact Material: CuSn  
 Contact plating: Sn over Ni  
 Insulator Material: PBT UL94V-0

Compatible with counterpart stock  
 MKS 18XX-6-0-XXXX

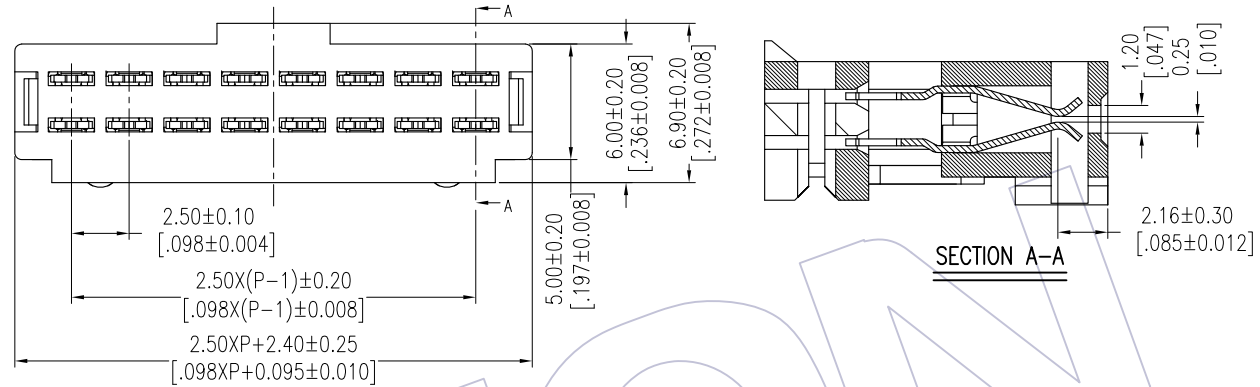


## Ordering Information



WF2512-HI **XX** **G** **0** **2**

No. of pins: 02-20P  
 Color: G-Grey  
 Packing: 0=Tray

1 PIN

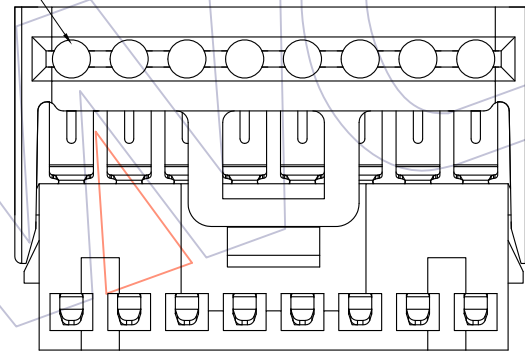

8P-15P结构

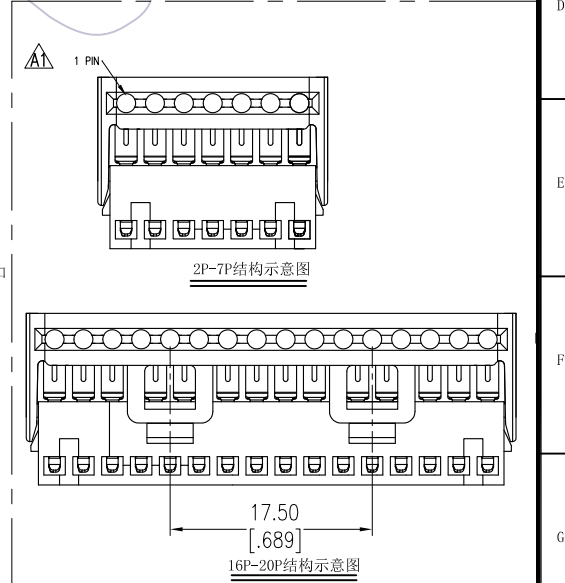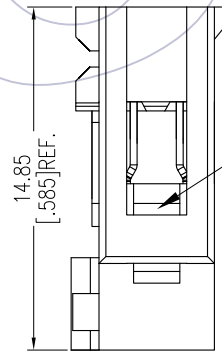

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
				X.X ±0.40	JYHuang	2015/10/16	UNIT	mm	WF2512-HIXXG02
A1	2015/10/16	增加结构示意图	-----	X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE: 2.50 IDC SOCKET
AO	2015/05/07	NEW	-----	X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.
				Angle ± 3'			PROJ.		
				DIM TOL					

Http: [www.wcon.com](http://www.wcon.com)

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: <a href="mailto:sales@wcon.com">sales@wcon.com</a>	WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: <a href="mailto:salesks@wcon.com">salesks@wcon.com</a>
---	--